
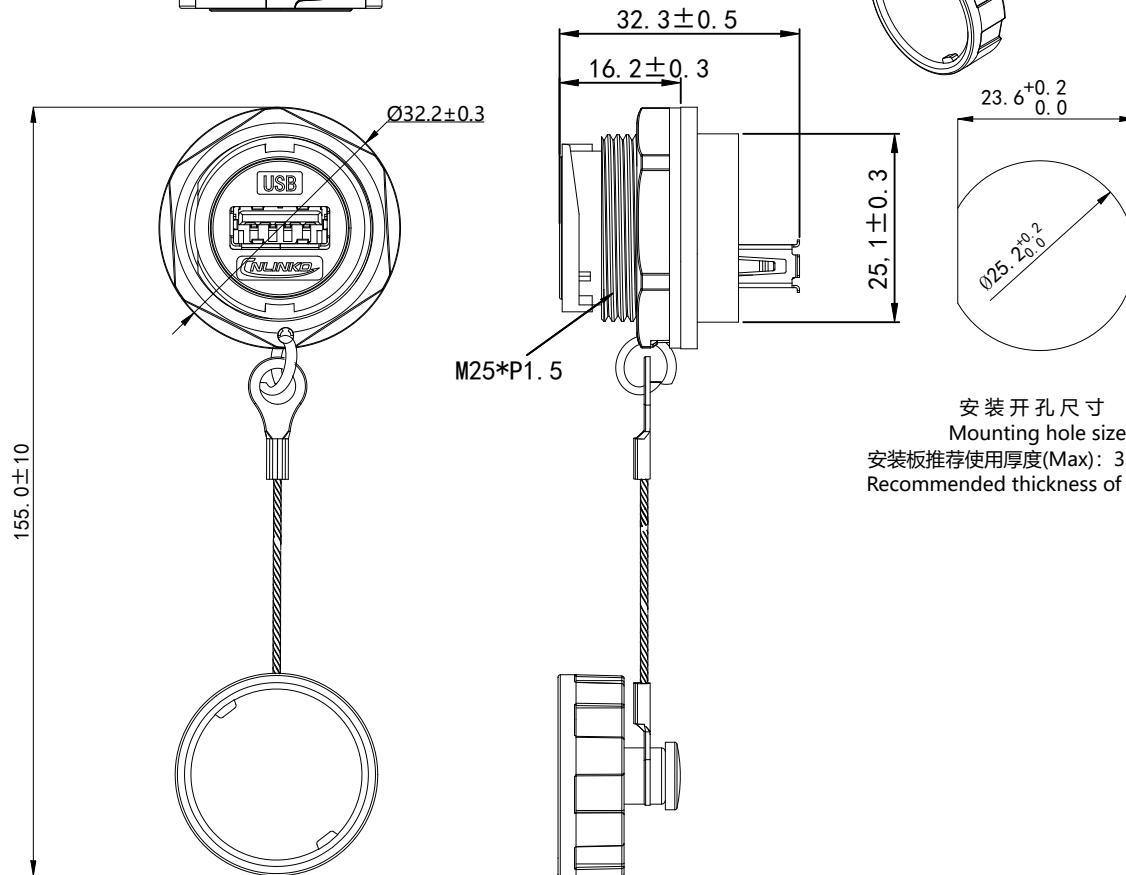
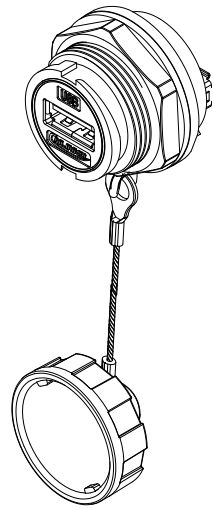


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LINKO ELECTRIC PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM LINKO CORP.

COPYRIGHT - 2024

BY LINKO ELECTRIC COPYRIGHT



安装开孔尺寸
Mounting hole size
安装板推荐使用厚度(Max): 3mm
Recommended thickness of mounting plate

ECN NO.	REV.	MODIFICATION	DATE	DRAWN	APPROVED
N/A	A1	初版发行	2024/02/26	杨今心	宋星亮

编码原则:

Part Number rules

YU-XXXX-J SX-XX-XXX X
1 2 3 4 5 6 7

- 产品系列: 以两个字母表示如LP/DH/BD/YF/YP/YW/YZ/YT/LK....等.
Type descriptions it can be LP/DH/BD/YF/YP/YW/YZ/LK, etc.
- 产品型号: RJ45/USB
Product model
- 公母类别: C=公针/端 J=母针/端
Interface type C=male pin/end J=female pin/end
- 连接器类型 PE=插头 SX=插座 PP=对接插座
Connector Type PE=Plug SX=Receptacle PP=Floating connector
- 序列号Serial number: 00-99
- 流水码Streaming code: 001-999
- 区别码空白或A~Z / Distinction code: blank or A-Z

技术要求 Specifications:

- 额定电流 Rated current: 1.8A
- 额定电压 Rated voltage: 5VAC
- 耐压 Dielectric withstanding voltage: 100VAC
- 绝缘阻抗 Insulation resistance (Min): 500MΩ
- 接触阻抗 Contact resistance (Max): 30 mΩ
- 适用线规 Wire gauge: /
- 适用线径(外被) Cable OD: 无
- 防护等级 IP code: ☐ IP44 ☐ IP65 ☒ IP67 ☐ IP68 ☐ IPx9k
- 机械寿命 Operating cycles (Min): 500次
- 紧固扭矩 Tightening torque: 1.5N.m
- 工作温度 Operating temperature: -25°C ~ +85°C

X.X±0.3 X.XX±0.15 X.XXX±0.100 TOLERANCES UNLESS OTHERWISE SPECIFIED			 深圳市凌科电气有限公司 SHENZHEN LINKO ELECTRIC CO.,LTD		
DRAWN	杨今心	2024/02/26	TITLE: YU-USB3单孔法兰母插座后安装 塑胶+金属(钢丝绳索带)		
CHECKED	杨 武	2024/02/26			
APPROVED	宋星亮	2024/02/26			
UNIT: mm	SIZE: A4	SHEET: 1/1	P/N: YU-USB3-JSX-01-004		A1
PORJ.		SCALE /			