

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LINKO ELECTRIC PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM LINKO CORP.

1 2 3 4 5 6 7 8 9 10
COPYRIGHT - 2024 BY LINKO ELECTRIC COPYRIGHT





ECN NO.	REV.	MODIFICATION	DATE	DRAW	APPROVED
	A1	初版发行	2024/02/26	杨今心	宋星亮

编 码 原 则:

Part Number rules

YT- XXXX- X XX- XX- XXX X
1 2 3 4 5 6 7

1. 产 品 系 列 : 以两个字母表示如LP/DH/BD/YF/YP/YW/YZ/YT/LK...等.
Type descriptions it can be LP/DH/BD/YF/YP/YW/YZ/LK, etc.
2. 产 品 型 号 : RJ45/USB
Product model
3. 公 母 类 别 : C=公针/端 J=母针/端
Interface type C=male pin/end J=female pin/end
4. 连接器类型 PE=插头 SX=插座 PP=对接插座
Connector Type PE=Plug SX=Receptacle PP=Floating connector
5. 序 列 号Serial number : 00-99
6. 流 水 码Streaming code: 001-999
7. 区 别 码 空 白 或 A ~ Z / Distinction code: blank or A-Z

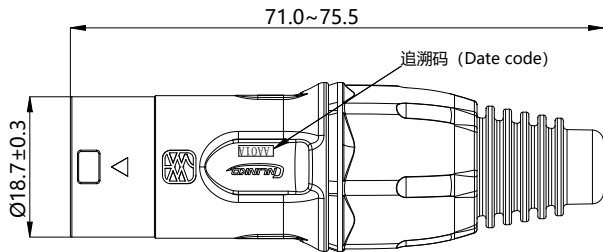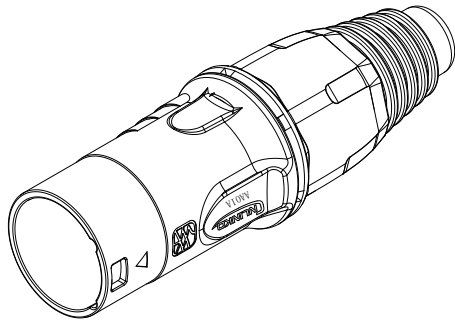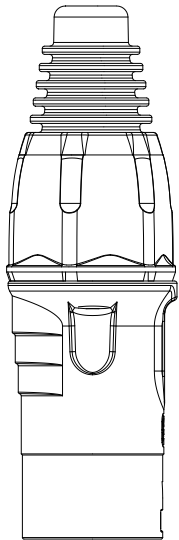

技术要求 Specifications:

1. 额定电流 Rated current : /
2. 额定电压 Rated voltage : /
3. 耐 压 Dielectric withstanding voltage: /
4. 绝缘阻抗 Insulation resistance (Min) : /
5. 接触阻抗 Contact resistance (Max) : /
6. 适用线规 Wire gauge: 无
7. 适用线径 (外被) Cable OD: $\phi 5.0 \sim 6.8$ mm
8. 防护等级 IP code: 连接状态 ☐ IP44 ☐ IP65 ☒ IP67 ☐ IP68 ☐ IPx9k
9. 机械寿命 Operating cycles (Min) : 500次
10. 紧固扭矩 Tightening torque: 1.3N.m
11. 工作温度 Operating temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

X.X±0.3 X.XX±0.15 X.XXX±0.100 TOLERANCES UNLESS OTHERWISE SPECIFIED			X°±3° X.X°±1.0° 未注圆角R0.2			LINKO 深圳市凌科电气有限公司 SHENZHEN LINKO ELECTRIC CO.,LTD	
DRAWN	杨今心	2024/02/26	TITLE: YT型RJ45公插头塑胶+金属款其它接线 (圆形三代防水+ $\phi 6.8$ mm尾部密封圈)				
CHECKED	杨武	2024/02/26					
APPROVED	宋星亮	2024/02/26					
UNIT: mm	SIZE: A4	SHEET: 1/1	P/N: YT-RJ45-CPE-10-xxxx				A1
PORJ.		SCALE /					